

WR-10 X6 Multiplier, 75-90 GHz

Features:


- Compact
- Waveguide Output
- Single +9V Supply Operation
- +4dBm output
- +14dBm input



Specifications

Parameter	Specification	Notes
Fout Frequency Range	75-90 GHz	
Fin Frequency Range	12.5 GHz – 15.0 GHz	
DC Supply	8-12VDC	
Pout	+4 dBm, typ.	See Plot
Output Connector	WR-10	
Input Connector	2.92mm/SMA compatible	

Measured Data (typ.)

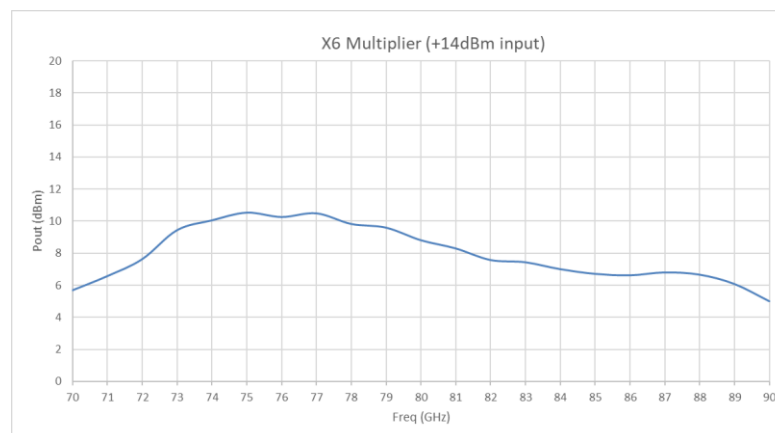



MILLIMETER WAVE SYSTEMS, LLC
AMHERST, MA US
413.345.6467
MILLIMETERWAVESYSTEMS.COM

Ordering Information

200345-01	WR-10 X6 Multiplier, 75-90 GHz
ECCN	3A001.b.4.e.3

Specifications subject to Change without notice.

200345 MWS WR-10 X6 Multiplier, 75-90 GHz 20210203.docx
