


## WR-10 Medium Power Amplifier, 88-95 GHz, 21dBm Psat

### Features



- 88-95 GHz
- 21 dBm Psat typ.
- Gain: 12 dB typ.
- Internally regulated and bias sequenced


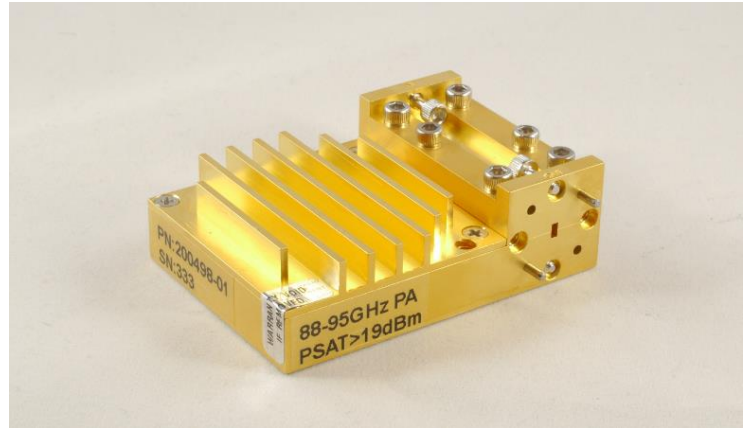


### Specifications


Parameter	Specification	Notes
Frequency Range	88-95 GHz	
Gain	12dB typ. 10 dBm	
Psat	20 dBm typ. 19 dBm min	
P1dB	19 dBm typ 18 dBm min	
RF Connector	WR-10	
DC Power	+8-10V, 0.5 A max (.34A typ.)	

### Measured Data (typical)

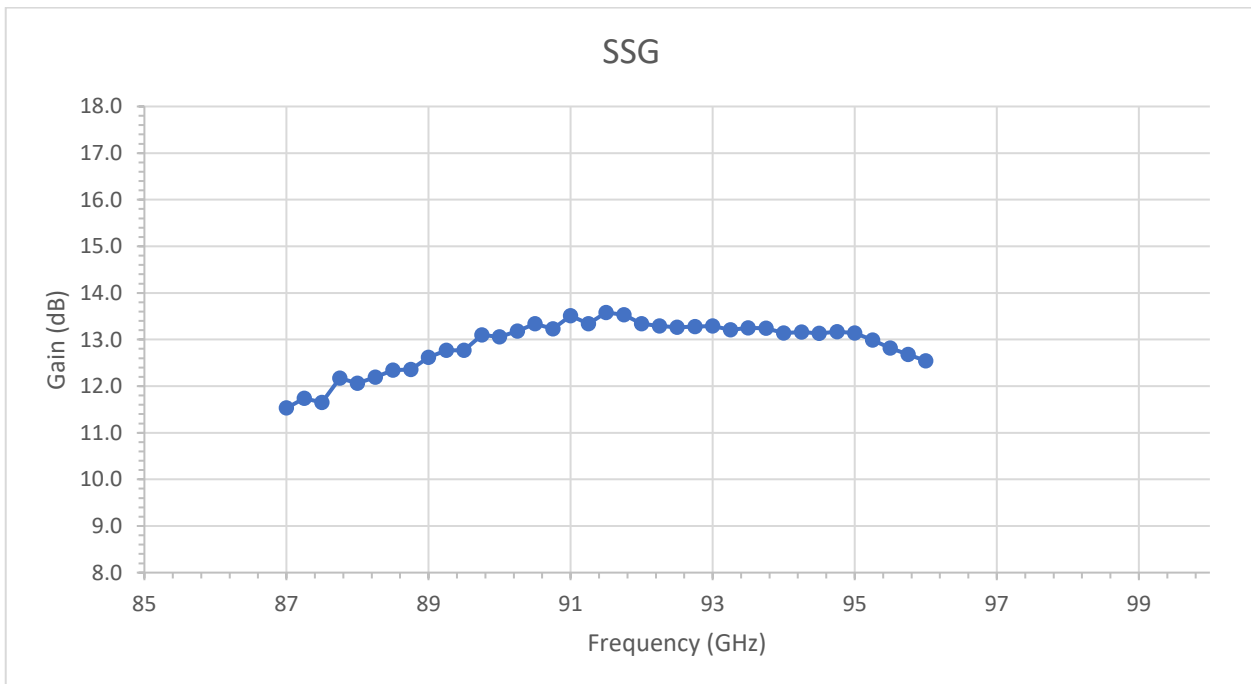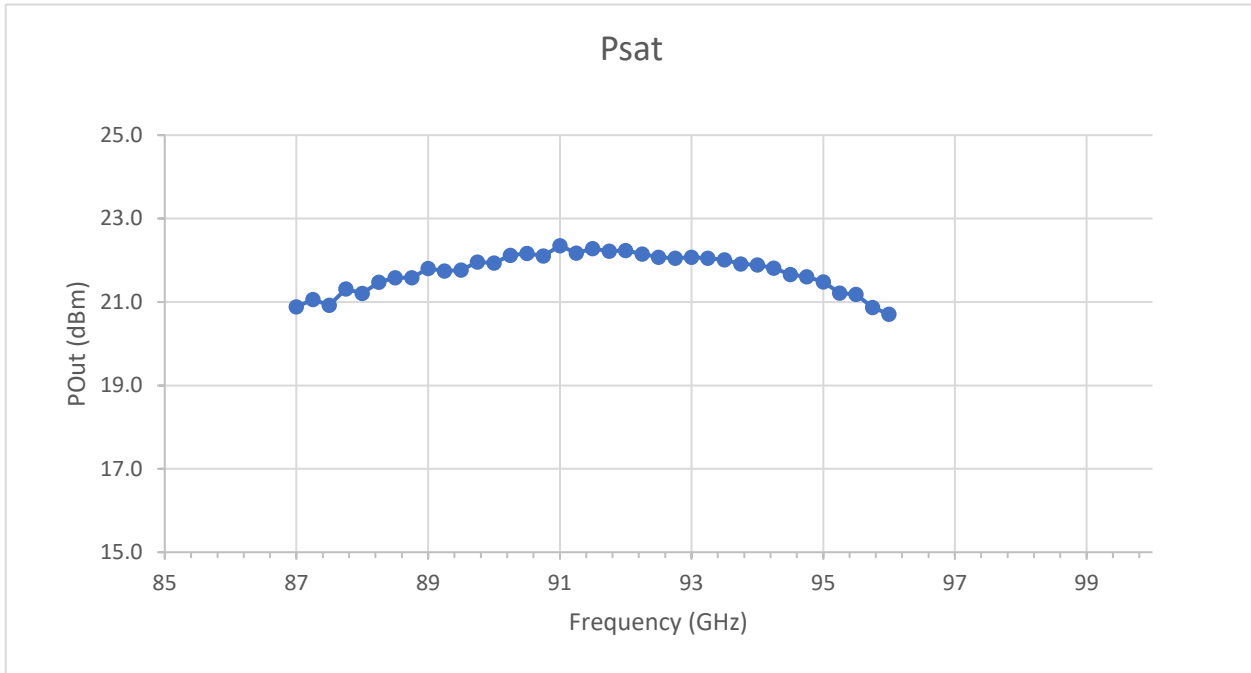

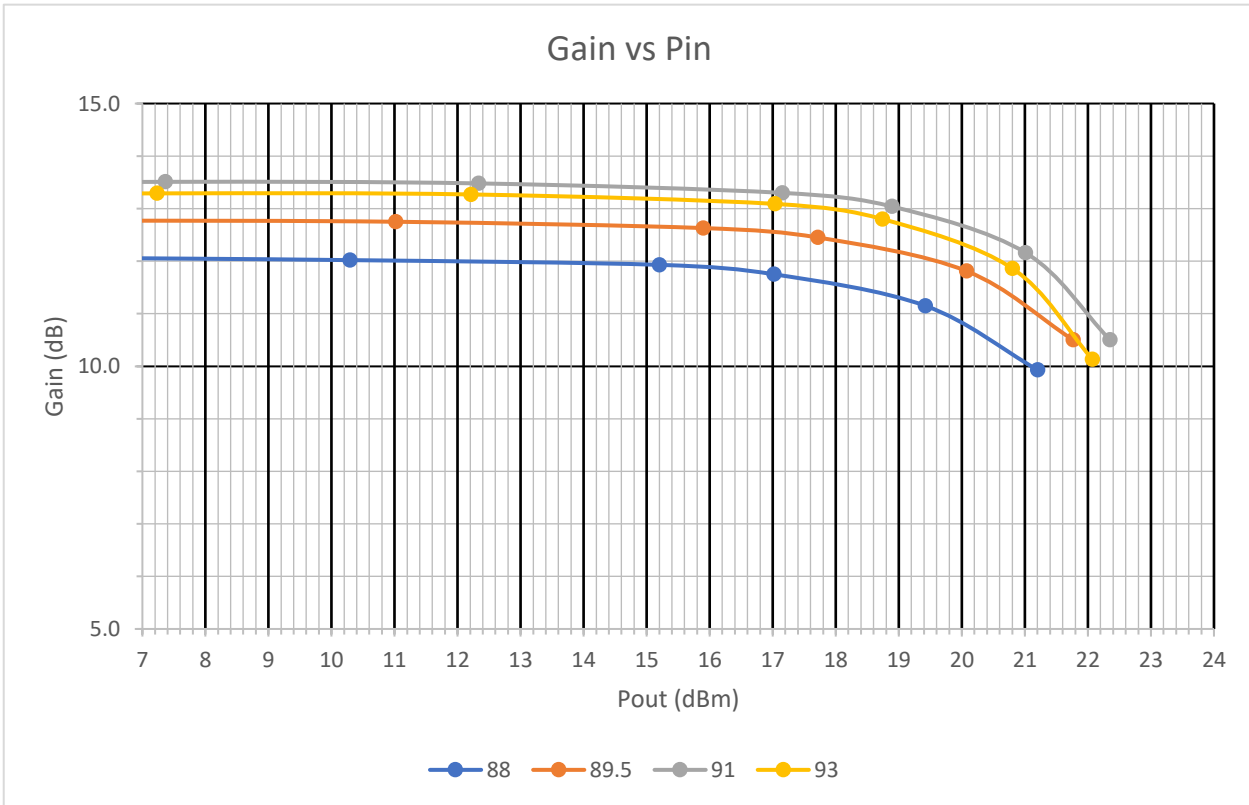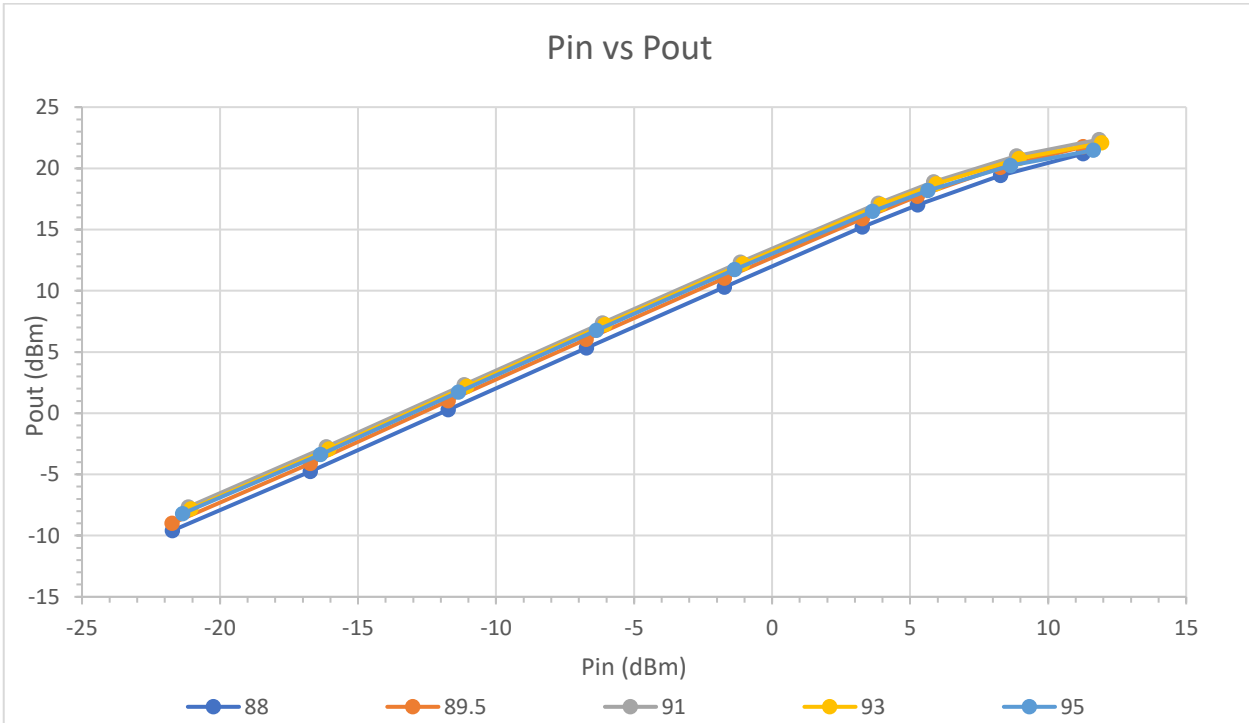

**Outline Drawing [mm] Inches**

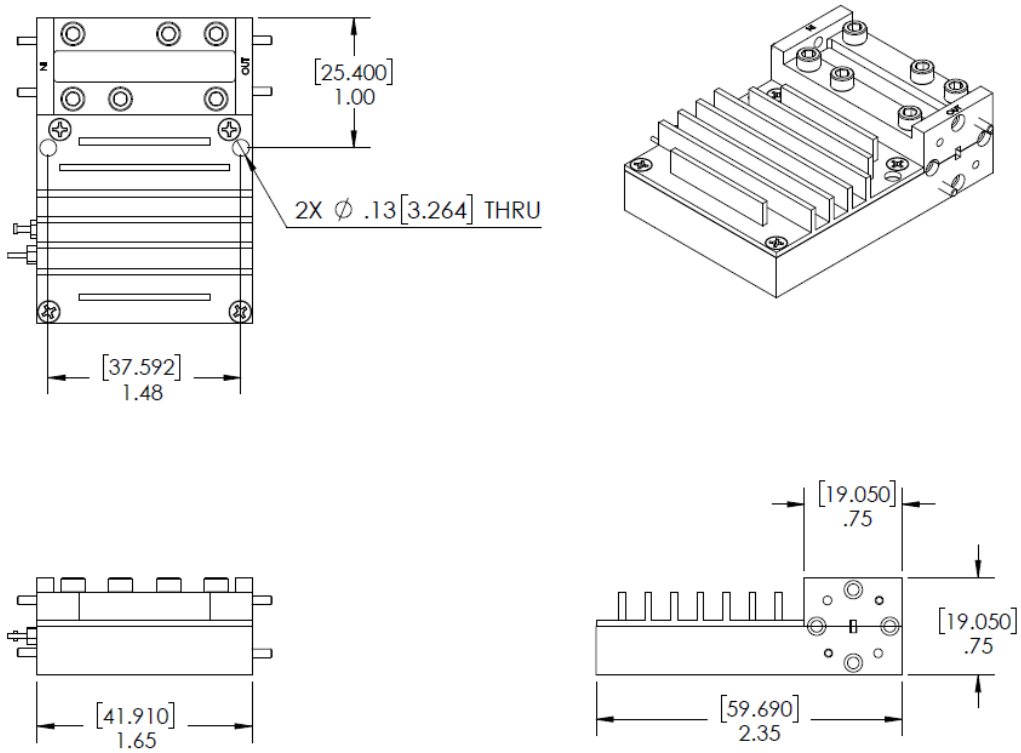

**Ordering Information**

200498-01	MPA, 88-95 GHz, WR-10, 21dBm Psat
Export	Export: 3A001.b.4.e.3

Specifications subject to change without notice.